



AIR CONDITIONING



REFRIGERATION



HEATING



compact

CONDENSATE REMOVAL PUMP



The compact boiler pump uses piston technology and has an impressive head and flow. Ideal for domestic gas boilers and furnaces.



35L/h max. flow





15m max. rec. head (flow rate 10L/h)

KEY FEATURES


- Compact & discreet
- High head
- Bracket for easy install
- Easy servicing

SUITABILITY

- Up to 85kW / 290,000Btu/h with condensate PH value >2.7
- Domestic gas fired condensing boilers; High efficiency gas furnace

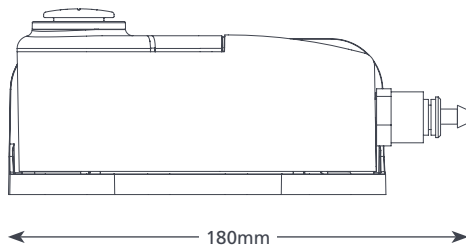


0.57 kg

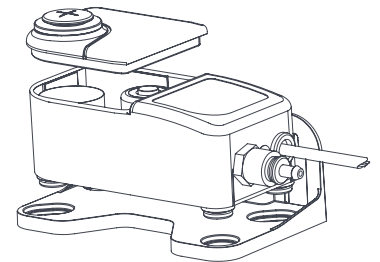

COMPACT BOILER SPECIFICATIONS

Max. flow	35L/h @ 0 head
Max. rec. head	15m
Tank capacity	0.24L
Sound level@1m	35dB(A)
Power supply	230 VAC, 0.1A, 50/60Hz
Rated	Non continuous
Class	II appliance <input type="checkbox"/>
Max. unit output	85kW / 290,000Btu/h
Max. water temp	60°C / 140°F
Inlet/outlet	27mm in, 6 & 10mm out
IP Protection	IP67
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	n/a

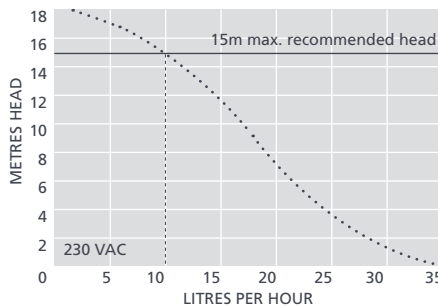

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Tube To Soil Stack Adaptor	FP2038
1 Amp Fuse	FP2620
Vinyl Tube Braided 3/8" (10mm)	AX5101
Acid Neutraliser	FP1021

Xtra For more installation accessories take a look at our Aspen Xtra range

COMPACT BOILER OPTIONS

Compact boiler pump (UK)	FP2944
Compact boiler pump (EU)	FP2947

IN THE BOX

Compact boiler pump (including hard wired 1m power cable) • Mounting Bracket • 6m discharge tube (6mm ID) • Pipe adaptor • Fixing kit • Install manual

Download manual at aspenspumps.com

Information correct at time of going to press.