



## Technical Specification | Mini Pumps

# Mini Blanc

Part No: Deluxe FP1080 / Basic FP1077

NEW

ASPEN-07/08

### Dimensions:

|         |         |
|---------|---------|
| Height: | 115mm   |
| Width:  | 182mm   |
| Depth:  | 55mm    |
| Weight: | 0.46 kg |

### Power Supply:

- **Deluxe:** 220 – 240V AC < 16W
- **Basic:** 220 – 240V AC < 11W
- 1PH 50/60 Hz
- 3A volt-free Alarm wires, N/C contacts rated @ 5A inductive at 220 – 240V AC

### In The Box:

- Frame with AV grommets
- Pump module
- PCB module (either with socket for 'Deluxe' model or hard-wired 1m cable for 'Basic' model)
- Float
- Float retainer
- Stayclean tablet
- Filter
- Reservoir
- Cover
- Plug/1m cable assembly (for 'Deluxe' version)
- Fixing pack, containing 3 x No.8 x 25mm screws, 3 x rawl plugs and 1 x hose clamp

### Other Features:


- **Deluxe:** Push-in plug
- **Basic:** Hard-wired
- Inlet i/d: 21mm
- Discharge tube: 6mm - ¼" i/d
- Hall effect semi conductor level sensors, with high level safety

- Cleanable/replacable 70 micron internal filter
- Maximum water temperature: 40°C
- Fully potted electronics
- Thermally protected
- Continuously rated
- CE marked
- Class II appliance

### Performance:


#### Deluxe:

- Water flow rate: 12 litres/hour at zero head
- Max. recommended head: 10m
- 21dB(A) @ 1m & 10m head

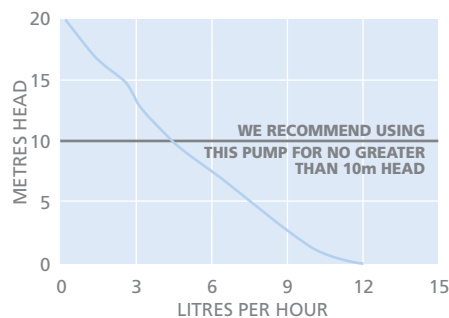

#### Basic:

- Water flow rate: 6 litres/hour at zero head
- Max. recommended head: 4m
- 18dB(A) @ 1m & 4m head

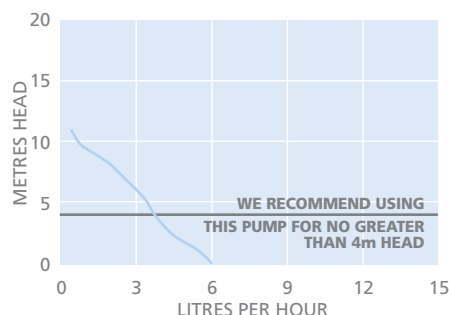

The Mini Blanc is the latest addition to the Aspen family of mini pumps, and has been designed to give the installation flexibility, where the latest generation of A/C units are becoming even smaller.

**The Mini Blanc is a discreet mini pump that can be mounted directly below the wall unit.**

Apex Way Hailsham  
East Sussex BN27 3WA  
T: +44 (0)1323 848842  
F: +44 (0)1323 848846  
sales@aspenspumps.com

[www.aspenpumps.com](http://www.aspenpumps.com)