




Approved standard: UL778
CSA C22.2 no.108-01

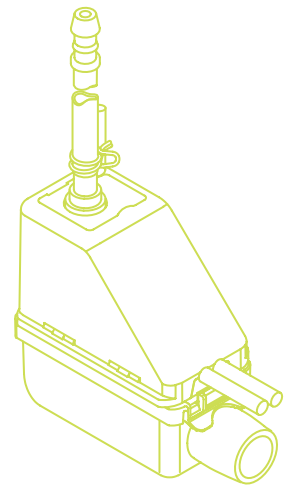

mini lime[®]

REPLACEMENT PACK

PART NO. FP2124/3 (EXTRA PART NO. FP 2124)

GB

DESCRIPTION

Replacement value pack for the Mini Lime[®] pump. Available in 'standard' and 'extra'.

INSTALLATION

- Completely reversible
- Quick and easy to install

Completely unique, in both design and installation advantages. The pump is clipped directly onto the reservoir so there is minimal suction lift. By connecting the drain hose to the reservoir of the pump unit, condensate water can be pumped away to a suitable drain.

IN THE BOX

- 1 x Assembled Mini Lime[®] pump with 150mm Vinyl breather tube 6mm ID
- 1 x 1m Lime discharge tube with connector
- 1 x 220mm Lime inlet hose 14mm ID
- 1 x 90° hose connector
- 4 x Cable ties 300 x 3.6mm

'Extra' also includes:


- 1 x Inline filter
- 1 x Bracket

SPECIFICATIONS

- Pump rating: 230V AC, 16W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Maximum water temperature: 40°C
- Continuously rated
- Class II appliance
- Fully potted
- Thermally protected
- 79mm (h) x 99mm (w) x 44mm (d)
- Weight: 0.31kg

PERFORMANCE

- Water flow rate: 12L/hr at zero head
- Maximum recommended head: 10m
- 23dB(A) @ 1m

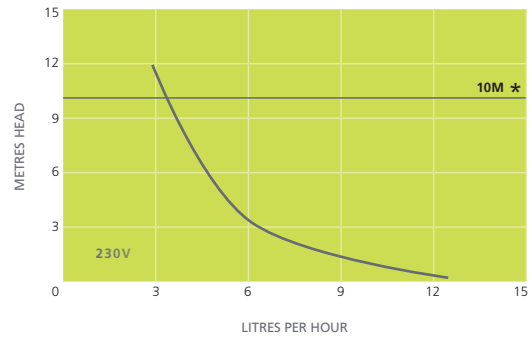

* Max. recommended head

HORIZONTAL LOSSES

| L/h | Horizontal (max 100) | | |
|------------------|----------------------|-----|-----|
| | 30m | 60m | 90m |
| Vertical Head 3m | 7.6 | 7.6 | 7.6 |
| Vertical Head 2m | 8.3 | 8.3 | 8.3 |